

Time 180

LL155180BN


Lombardo.



Technical information:

Installation:	Post Ø60, Conical post Ø60
Material:	Aluminium
Finish:	Black RAL 9005
Treatment:	Sea Treatment
Diffuser type:	Transparent glass
Lamp type:	LED
Energy performance class:	D
Colour temperature:	4000K
CRI:	>80
LB Factor:	LM90B10 - 60.000
Photobiological risk:	RG1
Power consumption (Watt):	30
Lumen:	4000
Real Lumen:	3000
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	18 - 31 - 30 - 51
B10 - C10 - B16 - C16	
Insulation class:	☐ CL.II
Type of protection:	IP 65
Resistance to breakage:	IK 08 5J xx7
Standards and Marks of Conformity:	CE UK ENEC
Operating temperature:	-20°C / +45°C


Recommended for installation on Ø 60 metal poles. Not suitable for Still poles. Cable ON-OFF version: 1m H05RN-F 2x1. Cable DALI version: 1m H07RN-F 4x1.




Time 180

LL155180BN

Lombardo.

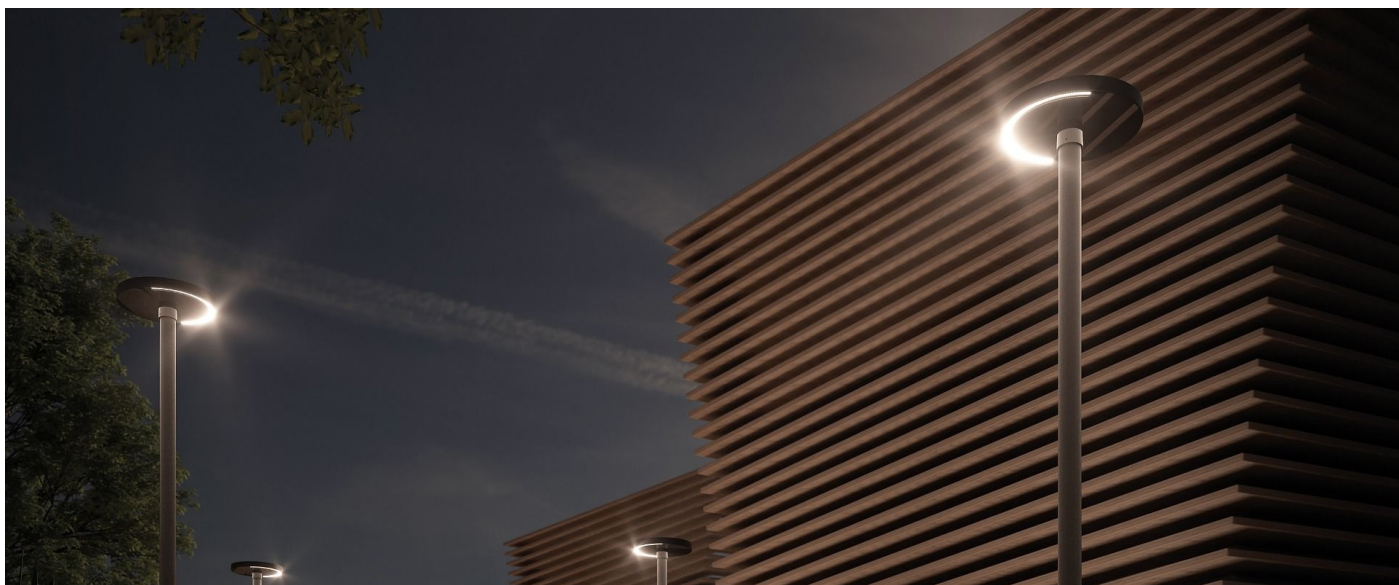

Lighting simulation:

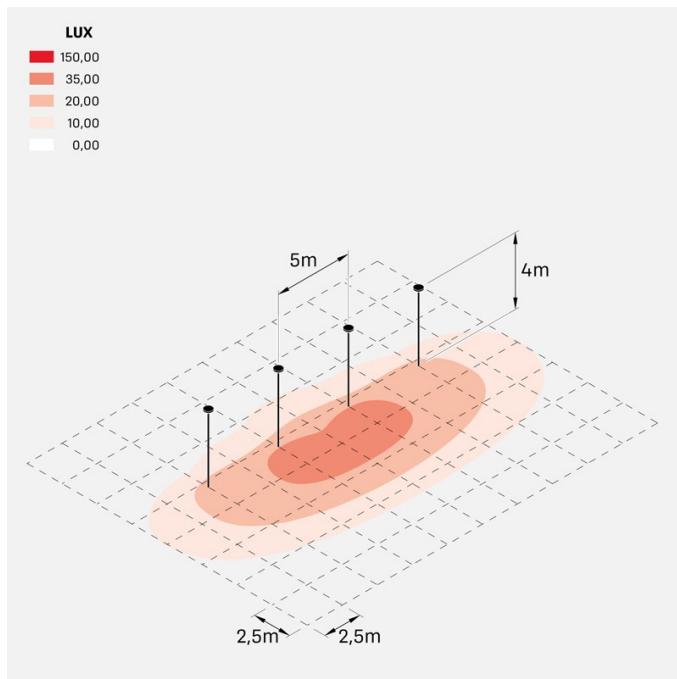

Time_180_26W

Photometric curves:

